


The Bituminous Aggregate in the upper part of the base widening shall finish approximately  $\frac{1}{4}$ " above the edge of the existing pavement where no preleveling is used. Where a preleveling (using intermediate course material) is specified it shall be placed prior to excavation of the widening trench and the upper course of the base widening shall finish approximately  $\frac{1}{4}$ " above the preleveling.

### COURSE DETAIL FOR WIDENING

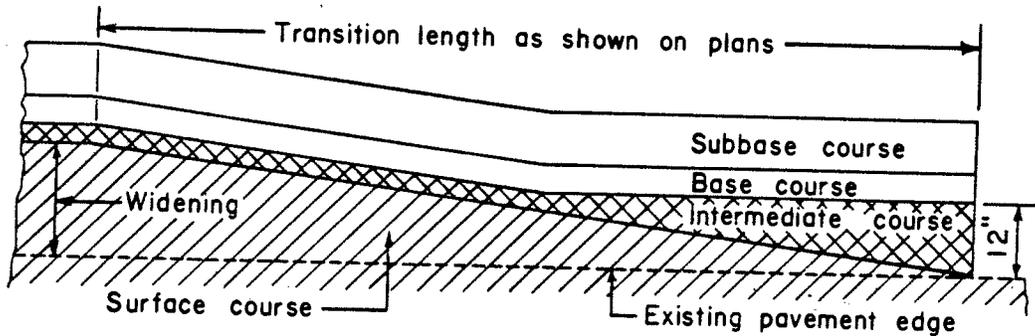

### MERGING EDGE OF PAVEMENT WIDENING WITH EDGE OF EXISTING PAVEMENT

APPROVED 4/26/90 DATE

Kent Huston  
CITY ENGINEER

REVISED:

## PAVEMENT WIDENING DETAILS

011231 P17.34D

CITY OF LANCASTER, OHIO  
DEPARTMENT OF ENGINEERING

STANDARD  
CONSTRUCTION DRAWING

DWG. BY: R.F.M.  
CHK'D BY: RM

FILE NUMBER  
P-17