



SIDEWALK AND CURB REPAIR DETAILS

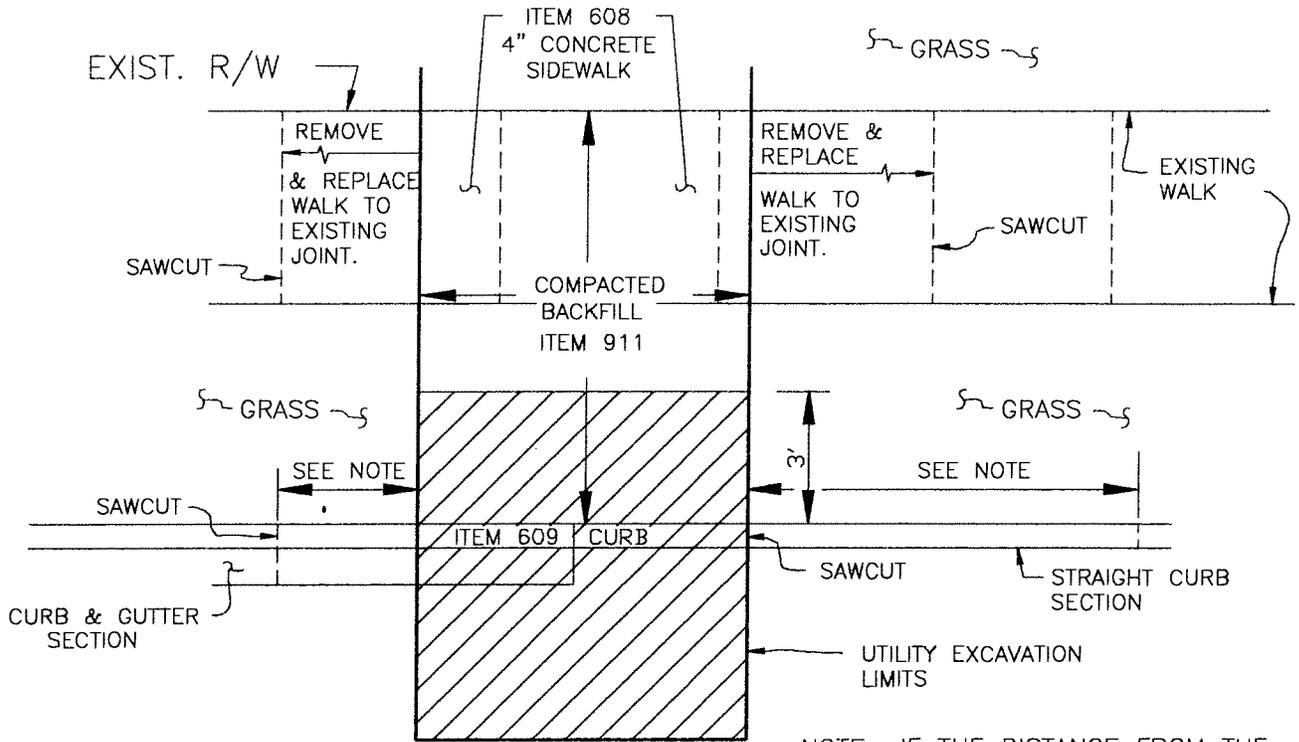

PLAN VIEW

NOTE: IF THE DISTANCE FROM THE CUT TO THE NEAREST JOINT IN THE CURB IS LESS THAN 5', THE CURB/GUTTER SHALL BE REMOVED AND REPLACED TO THE JOINT. IF THE DISTANCE IS GREATER THAN 5', THE CURB MAY REMAIN.

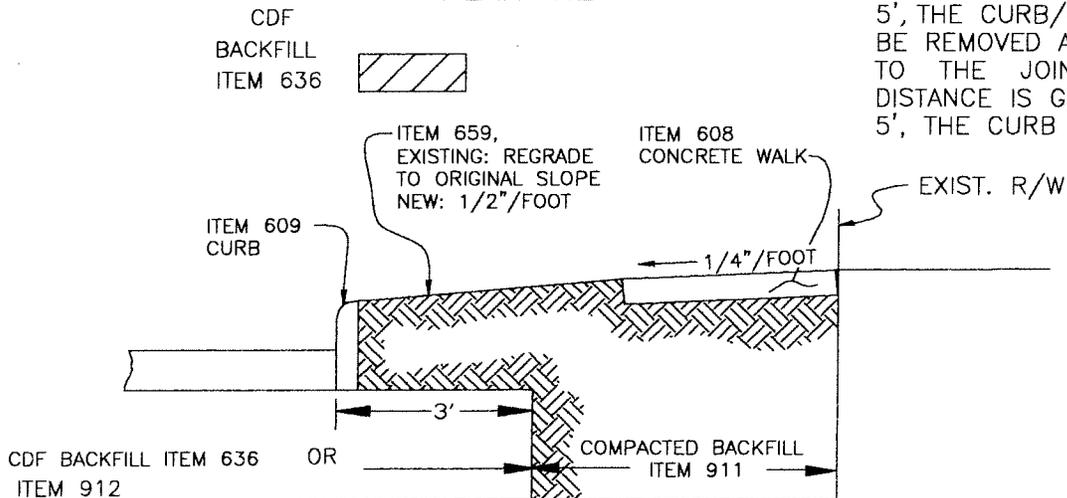

BOTTOM OF EXCAVATION

ALL GRASS AREAS SHALL BE SEEDED IN ACCORDANCE WITH ITEM 659 SEEDING AND MULCHING, LAWN MIXTURE.

APPROVED 1-22-01

Keith Houston
CITY ENGINEER

REVISED:

TYPICAL
PAVEMENT
AND UTILITY
CUT REPAIR
STANDARDS

CITY OF LANCASTER, OHIO
DEPARTMENT OF ENGINEERING

STANDARD
CONSTRUCTION DRAWING

DWG. BY: DDK

CHK'D BY: RM

FILE NUMBER

P-2 1 of 1