

NOTES:

1. TEMPORARY PAVEMENT SHALL BE PROVIDED AS SOON AS THE EXCAVATION HAS BEEN BACKFILLED.
2. ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO THE PERTINENT SECTION OF CMSL.

APPROVED 7-18-19
Michael Volup
CITY ENGINEER

TEMPORARY
PAVEMENT
REPLACEMENT

CITY OF LANCASTER, OHIO
DEPARTMENT OF ENGINEERING


STANDARD
CONSTRUCTION DRAWING

DWG. BY:DDK.....
CHK'D BY:MN.....

FILE NUMBER
P-25
Shf. 1 of 2

REVISED: 18 JUL 19

Remove 2 1/2" Concrete and Replace with Asphalt Surface Course, By May 15th of the following Spring.

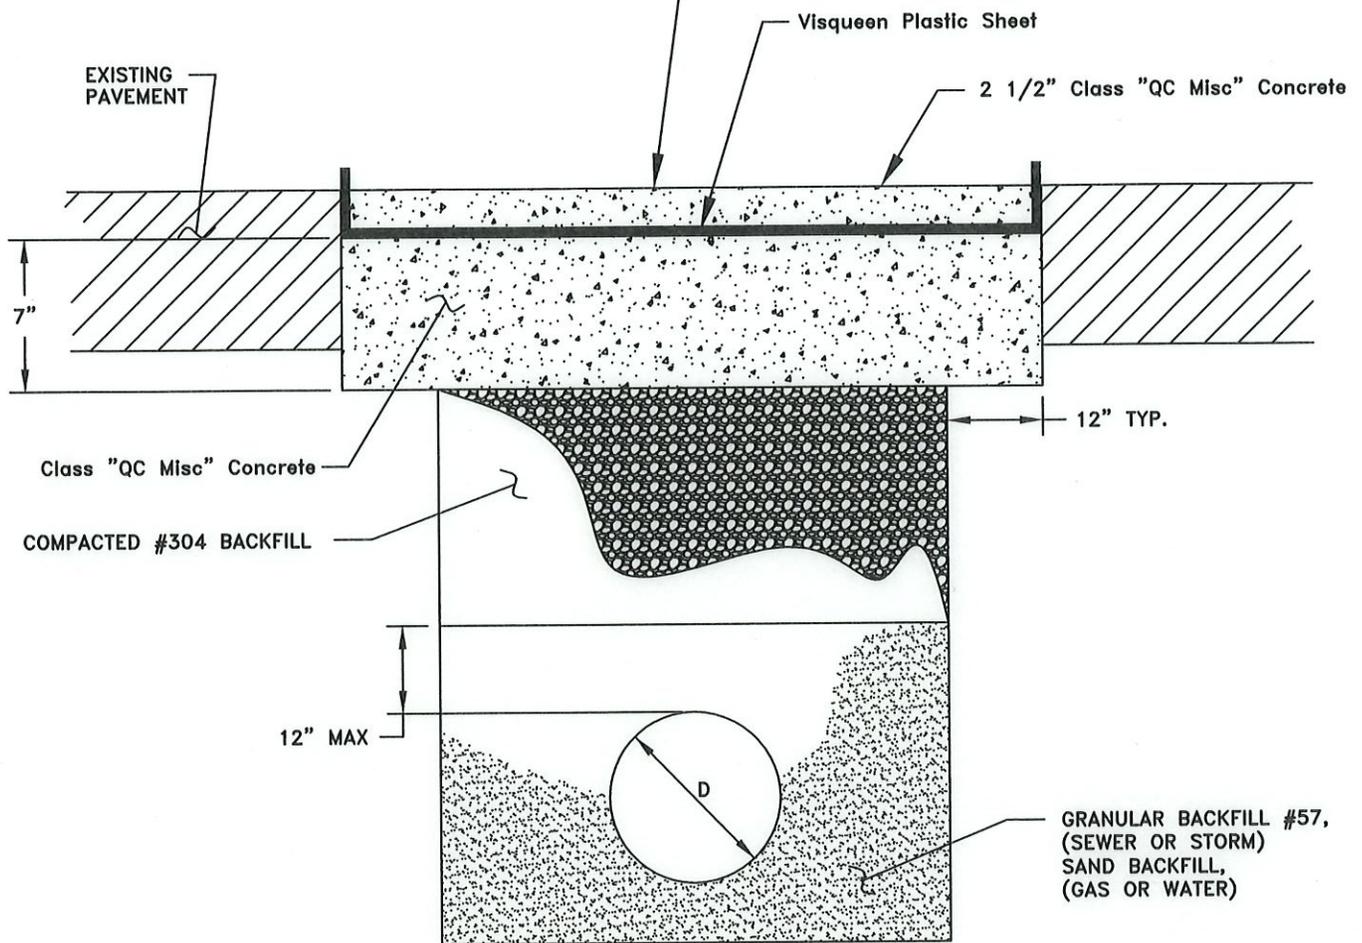

NOTES:

1. DURING THE MONTHS THAT THE ASPHALT PLANTS ARE SHUT DOWN, THE ABOVE PAVEMENT REPLACEMENT IS TO BE USED.
2. THE VISQUEEN IS TO PROJECT A MINIMUM OF 1-2 INCHES ABOVE THE SURFACE ALL THE WAY AROUND PATCH.
3. WHEN THE PLANTS HAVE RE-OPENED, THE TOP 2 1/2 INCHES OF CONCRETE AND THE VISQUEEN ARE TO BE REMOVED AND SURFACE COURSE ASPHALT IS TO BE PLACED BACK IN THE VOID. SEAL JOINT WITH A BEAD OF HOT APPLIED CRACK & JOINT SEALER.

APPROVED 7-18-19
Mitch Wolan
 CITY ENGINEER

REVISED: 18 JUL 19

TEMPORARY
 WINTER
 PAVEMENT
 REPLACEMENT

CITY OF LANCASTER, OHIO
 DEPARTMENT OF ENGINEERING

STANDARD
 CONSTRUCTION DRAWING

DWG. BY: DDK
 CHK'D BY:

FILE NUMBER
P-25
 Sht. 2 of 2