


STANDARD BOLLARD - 6"x6"x6'-4" No. 2 SOUTHERN YELLOW PINE. ALL TIMBERS ARE TO BE TREATED WITH A.W.P.I. L.P. 22 (WOLMAN SALTS OR EQUAL) AND HAVE A RETENTION OF 40 P.S.F.

NOTES:

- THE CONTRACTOR SHALL INSTALL THE EARTHEN BACKFILL IN 6" LIFTS AND TAKE CARE TO PLUMB EACH POST.
- THE IRON SLEEVES, ANGLE IRON, AND ANCHOR RODS SHALL BE PAINTED WITH TWO COATS OF RUST-OLEUM No. 769 DAMP-PROOF RED PRIMER OR EQUAL PRIOR TO INSTALLATION.
- THE CONTACTOR MAY SUBSTUTUTE A 24" CIRCULAR FOOTER IN PLACE OF THE ONE SHOWN.

BOLLARD SECTION (N.T.S.)

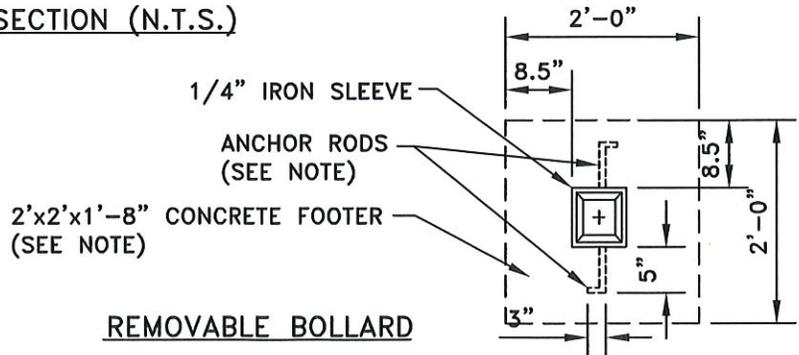

APPROVED 7-13-20
Mitchel Volod
 CITY ENGINEER

REVISED: 13 JUL 20

BIKE PATH
 WOOD BOLLARD
 DETAIL

CITY OF LANCASTER, OHIO
 DEPARTMENT OF ENGINEERING
 STANDARD
 CONSTRUCTION DRAWING
 DWG. BY: ADH
 CHK'D BY: MN
 FILE NUMBER
 M-1